


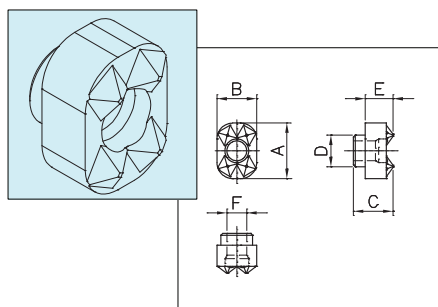

UGE 10

UNIT:mm

Code	A	B	C	D	E	F	Kg
Acciaio rapido temprato – Hardened Steel							
C250002	14	10	10	Ø8	7	4.5	


Parti include: Vite di fissaggio a Torx M4x13.5
 Part included: Gripper with Torx screw (Cod.C250003)

Inserto di bloccaggio universale con caratteristiche uniche per serraggio esterno o interno (brevettato):

- ☐ Per superfici di bloccaggio piane o rotonde
- ☐ Per serraggio interno o esterno
- ☐ Superficie di appoggio piana o rotonda
- ☐ Fissaggio anteriore
- ☐ La reallozzazione della sede dell'inserto nel morsetto è estremamente semplice
- ☐ La cementazione + tempra è necessaria

The universal gripper with unique features (patented):

- ☐ For flat and round clamping surfaces
- ☐ For exsternal and internal gripping
- ☐ Front mounting of bolts
- ☐ Gripper seat,round or flat,and thread is easy to produce
- ☐ Hardening of gripper seat necessary

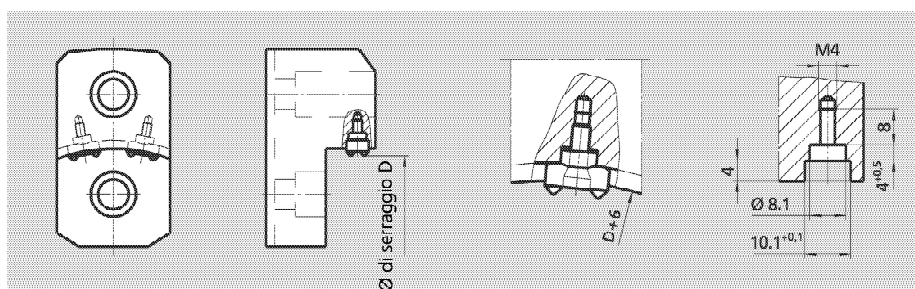


Istruzioni per il montaggio:

1. Tornire o fresare il diametro di serraggio D+6 mm
2. Forare e filettare
3. Cementare e temprare i morsetti

Mounting instruction:

1. Part ØD+6 mm (0.23 inch) + workstop + slot has to be turned or milled
2. Drill and tap
3. Harden jaw

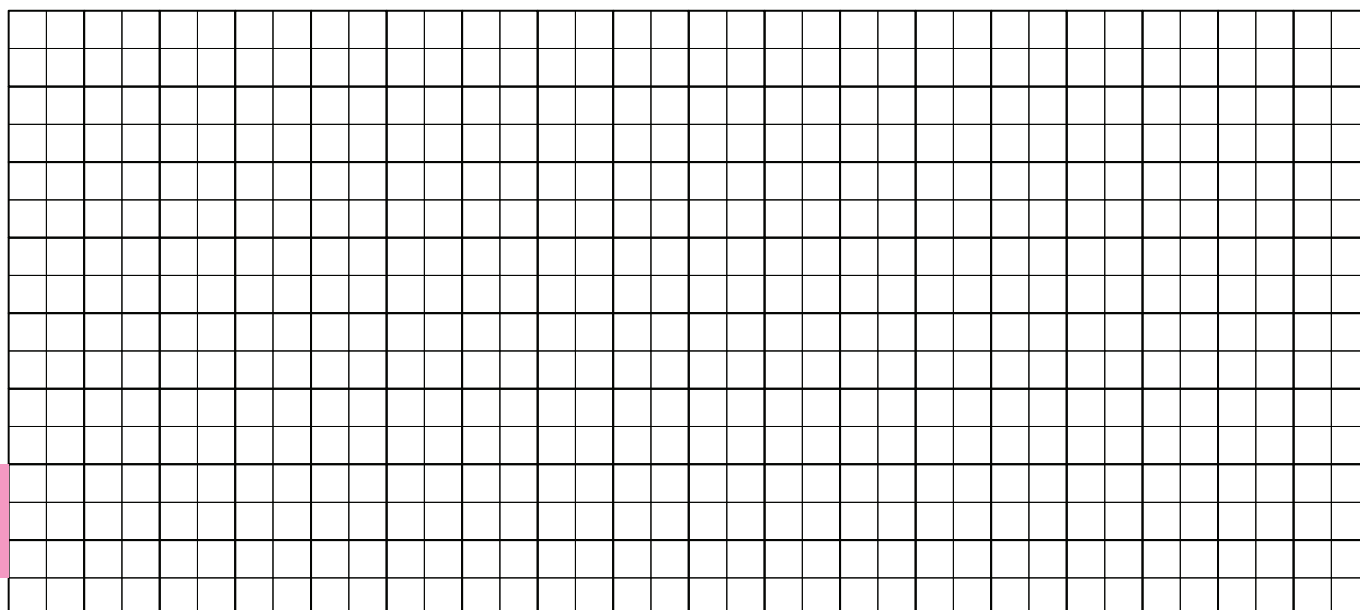

H